




204976
IRDBD 4 NSOK-IBS
Inductive wire break sensor

- Compact design
- Wear-resistant ceramic insert
- High resolution
- Short response time
- Pulse stretching adjustable
- Dynamic operating principle
- Resistant to dirt
- Metal connector
- High protection type

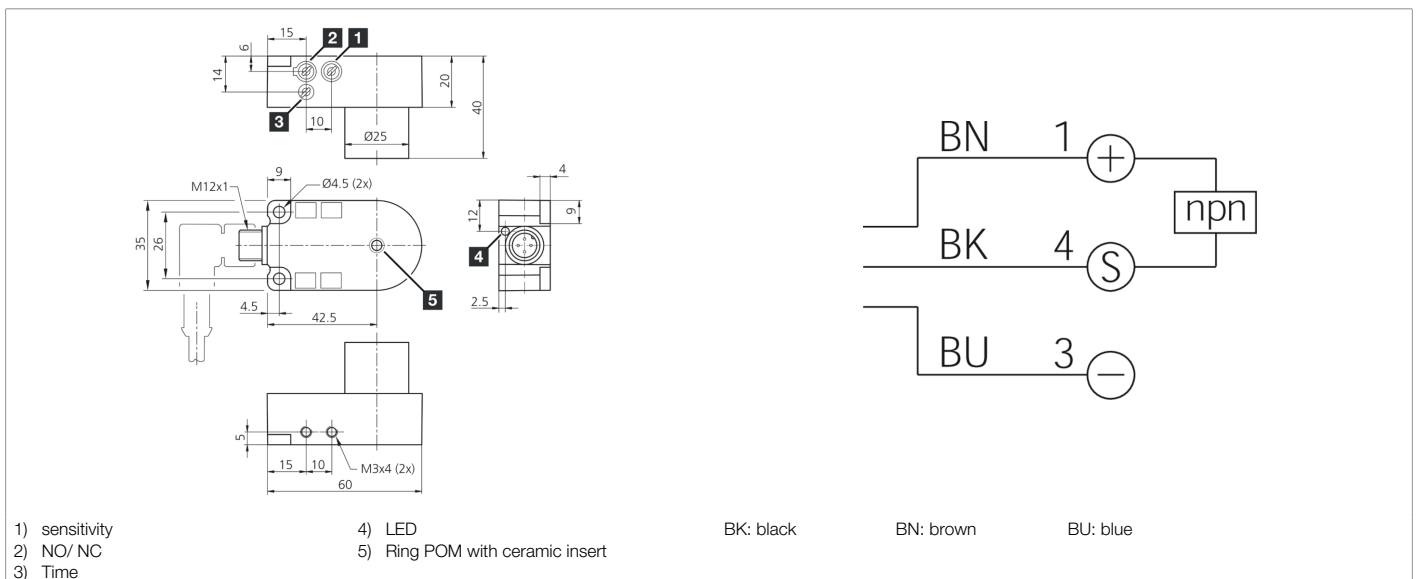

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	20 mA
Insulation voltage endurance	1.000 V
Internal diameter	4,0 mm
Assembly distance to metal (min.)	2 mm
Housing material	Plastic (PA)
Material	<ul style="list-style-type: none"> ■ POM (Ring) ■ Ceramic (Socket)
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	Dynamic
Switching output	npn, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Pulse stretching	0,1 ... 150 ms adjustable
Resolution	Ø 0,1 mm (Copper wire)
Sensitivity adjustment	Potentiometer
Speed of parts (max.)	35 m/s
Response time	0,20 ms
Release time	0,20 ms



204976

IRDBD 4 NSOK-IBS

Inductive wire break sensor

Technical data (typ.)

+20°C, 24 V DC

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Connector, M12, 4-pin

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/204976>