


 **207139**
BE-R30-F1-K-CLR
Ringlight

- High excess current factor
- Pulsed mode for inspection of fast moving objects
- Extremely powerful light for high depth of field
- Long life thanks to intelligent thermal management
- Homogeneous luminous field
- High protection type IP 67
- Robust metal housing



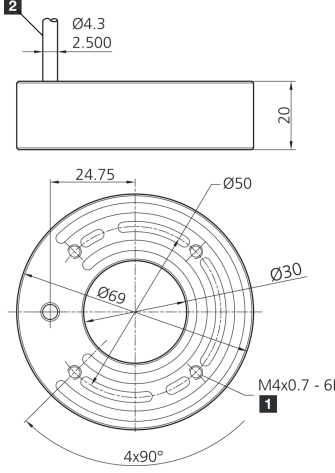


1) 6 mm deep 2) Connection cable

Betrieb ausschließlich mit
Flash-Controller an einem
Supply Class 2 - Netzteil!

Use only with flash
equipment driven by a
power supply Class 2!

A utiliser exclusivement
avec un contrôleur
d'impulsion connecté a
une alimentation Class 2!

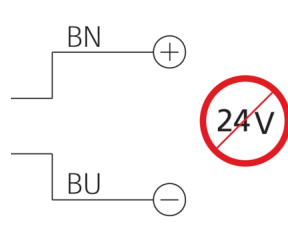

Function							
							   

Technical data (typ.)	+20°C, 24 V DC
Power consumption (in pulse / max.)	30,0 W
Energization factor (in pulse / max.)	8
Energization (in pulse / max.)	2.000 mA
Service voltage	No constant voltage!
Inverse polarity protection	Yes
Insulation voltage endurance	500 V
Diameter	Ø 30 / Ø 69 mm (Diameter)
Height	20 mm
Housing material	Aluminum (Black, Anodized)
Material	<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ PMMA, clear (Protection optics)
Risk group (DIN EN 62471)	Free group
Design	Ringlight
Light source	LED
Color	red (clear)
Wavelength	633 nm
Deflection angle FWHM	30°



207139
BE-R30-F1-K-CLR
Ringlight

Technical data (typ.)

+20°C, 24 V DC

Light intensity

- 7,00 kLx (100,0 mm / 100 %)
- 28,8 kLx (100,0 mm / 400 %)
- 60,5 kLx (100,0 mm / 800 %)
- 3,50 kLx (200,0 mm / 100 %)
- 13,0 kLx (200,0 mm / 400 %)
- 26,8 kLx (200,0 mm / 800 %)

Control

Flashable by means of flash controller

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1,0 mm

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 67

Connection

Cable, 2,5 m (flying leads, Use only with flash controller!)

More information / accessories

<https://www.di-soric.com/207139>