





207895

KDCT 08 V 02 G3-T4

Capacitive proximity switch

- Remote teach option
- Push-pull output pnp + npn
- Sensitivity adjustable, large operating distance
- Variable hysteresis
- Detection of liquids, powdery and solid materials
- Detecting metal and non-metal parts
- Detection possible even through containers and packaging
- Stainless steel housing

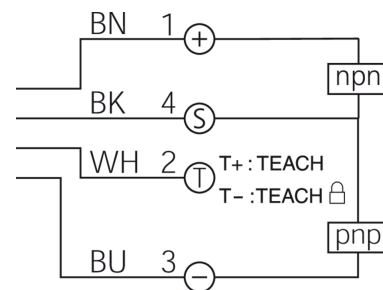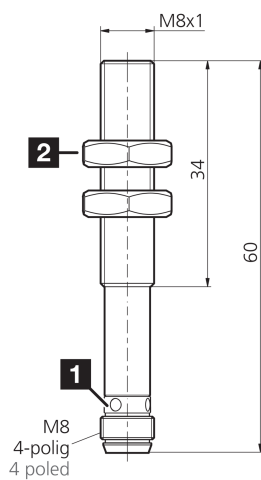

1) LED

2) Width over flats 13 mm

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	18 ... 30 V DC
No-load current (max.)	20 mA (24 V DC)
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M8 x 1
Housing length	60 mm
Housing material	Stainless steel (V2A 1.4301 / AISI 304)
Material of cable	Polyurethane
Material	PBT (Sensor probe)
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Evaluation	digital
Design	Thread
Scope of delivery	2 x M8 nuts
Switching output	Push-pull, 150 mA, NO/NC, switchable
Voltage drop (max.)	2,4 V
Switching distance (SN)	2 mm (0.1 to 3 mm adjustable)
Standardized measuring plate	8 x 8 mm
Switching hysteresis (max.)	variable
Sensitivity adjustment	Remote teach



207895

KDCT 08 V 02 G3-T4

Capacitive proximity switch

Technical data (typ.)

+20°C, 24 V DC

Display

LED yellow - Switching output

Switching frequency

70 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 65

Connection

Connector, M8, 4-pin

More information / accessories

<https://www.di-soric.com/207895>