





210542
ID-80-IM3-2-U
ID Handheld reader

- Fast, omnidirectional recognition of 1D, 2D codes and postal barcodes
- Manual or automatic trigger
- Fatigue-free work due to low weight
- Ergonomic design
- Reading feedback using LED and audible tone
- 5-year warranty

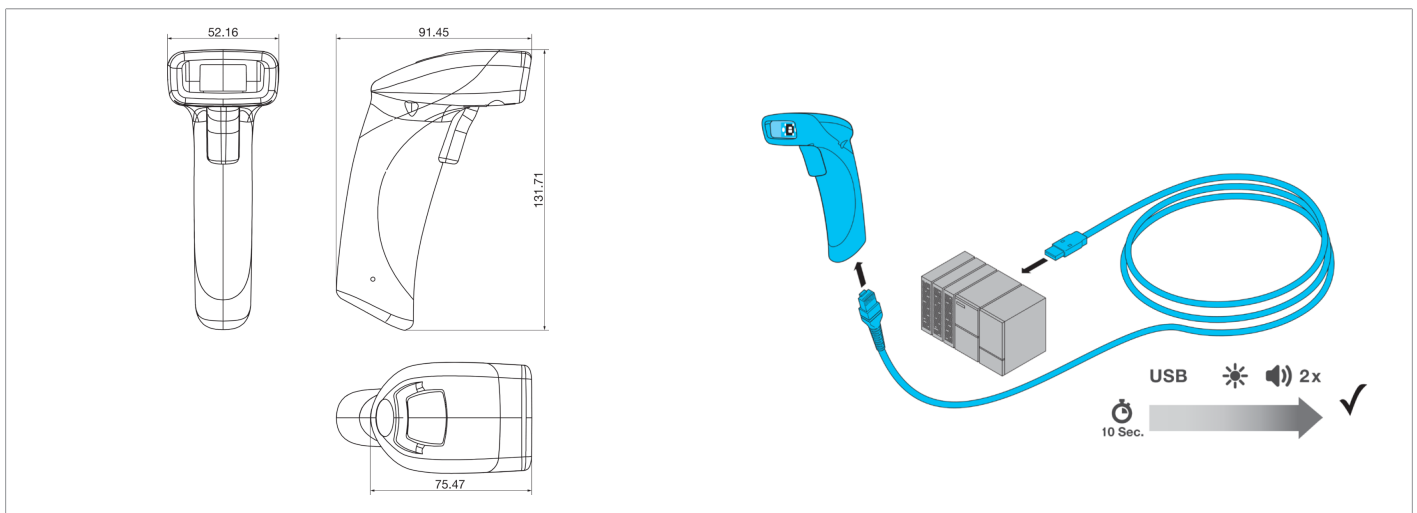

Function											
										CE	

Technical data (typ.)	+20°C, 5 V DC
Service voltage	5 V DC
No-load current (max.)	300 mA
Housing dimensions	132 x 52 x 91 mm
Housing length	91 mm
Housing height	132 mm
Housing width	52 mm
Housing material	Plastic
Weight	110 g
Note	Additional components are required for operation
Code type - 1D-Codes (barcodes)	Code 11, Code 32, Code 39, Code 93, Code 128, Interleaved 2 of 5, GSI DataBar, BC 412, Codabar, IATA 2 of 5, Hong Kong 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC / EAN / JAN
Code type - 2D-Codes	Data Matrix, Data Matrix Rectangular Extension, QR code, Micro QR Code, QR Model 1, Aztec Code, GoCode® (protected - additional license required)
Code type - Stacked codes	PDF 417, Micro PDF, GS1 Composite (CC-A/CC-B/CC-C)
Interface	USB (Type A operation with ID-K-RJ50/U-2)
Image sensor	CMOS
Resolution	1.280 x 960 Pixel
Position scanner to code	Tilt 180°, Pitch ± 65°, Skew ± 60°
Ambient temperature during operation	-20 ... +55 °C
Protection type	IP 54



210542
ID-80-IM3-2-U
ID Handheld reader

Technical data (typ.)

Connection

+20°C, 5 V DC

USB, RJ 50

More information / accessories

<https://www.di-soric.com/210542>