
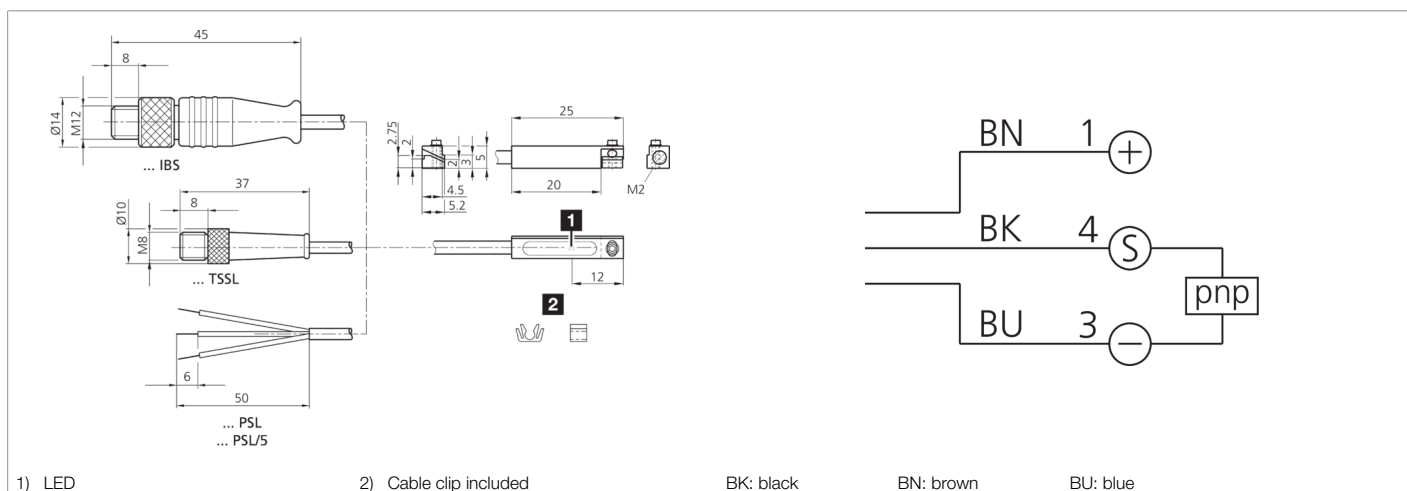



204805
MZEKS 25 PS-K-TSSL
Sensor for gripper systems

- Specially aligned magnetic field for use on grippers with T-slots
- Short design
- Fully electronic
- Fully molded electronic circuitry, vibration-resistant
- High reproducibility
- High protection type

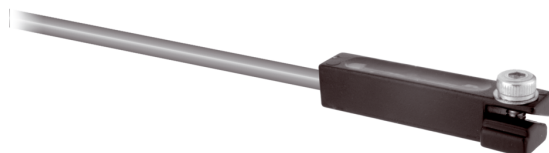

Function

												
--	--	--	--	--	--	--	--	--	--	---	---	---

Technical data (typ.)

+20°C, 24 V DC

Current-carrying capacity	100 mA, not short-circuit-proof, polarity-safe
Service voltage	10 ... 35 V DC
No-load current (max.)	12 mA
Insulation voltage endurance	500 V
Cylinder groove	T-groove, Can be inserted into the groove from above
Mounting	Clamping block
Housing material	Die-cast zinc
Material of cable	Polyurethane
Protection class	III, operation on protective low voltage
Switching output	pnp, NO, short-circuit-proof
Voltage drop (max.)	2 V
Switching capacity	< 3 W (30 V, 100 mA)
Reproducibility	< 0,1 mm
Display	LED yellow - Output signal
Switching frequency	1.000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 68 (Device and cable) / IP 67 (Connection plug)
Connection	Pigtail, 0,3 m, M8
Connection cable	TK ...

More information / accessories

<https://www.di-soric.com/204805>